

HF18FF

MINIATURE INTERMEDIATE POWER RELAY



File No.:E133481



File No.:R50147087



File No.:CQC09002030026 (DC type)
CQC09002030027 (AC type)



Features

- 7A switching capability (2C, 3C type)
- 1.5kV dielectric strength (between coil and contacts)
- Gold plated contact available
- Conform to the CE low voltage directive
- Sockets available
- 2 to 4 pole configurations
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (28.0 x 21.5 x 35.0) mm

CONTACT DATA

Contact arrangement	2C, 3C	4C
Contact resistance	100mΩ max.(at 1A 6VDC)	
Contact material	See ordering info.	
Contact rating (Res. load)	7A 250VAC/30VDC	5A 250VAC/30VDC
Max. switching voltage	250VAC / 30VDC	
Max. switching current	7A	5A
Max. switching power	210W 1750VA	150W 1250VA
Mechanical endurance	2 x 10 ⁷ OPS	
Electrical endurance	2Z/3Z type: 1 x 10 ⁵ OPS (7A 250VAC, Resistive load, Room temp., 1s on 9s off) 2Z/3Z type: 1 x 10 ⁵ OPS (7A 30VDC, Resistive load, Room temp., 1s on 9s off) 4Z type: 1 x 10 ⁵ OPS (5A 250VAC, Resistive load, Room temp., 1s on 9s off) 4Z type: 1 x 10 ⁵ OPS (5A 30VDC, Resistive load, Room temp., 1s on 9s off)	

CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)
Dielectric strength	Between coil & contacts 1500VAC 1min
	Between open contacts 1000VAC 1min
	Between contact sets 1500VAC 1min
Operate time (at nomi. volt.)	DC type: 25ms max.
Release time (at nomi. volt.)	DC type: 25ms max.
Temperature rise (no-load, at nomi.volt.)	60K max.
Shock resistance	Functional 98m/s ²
	Destructive 980m/s ²
Vibration resistance	10Hz to 55Hz 1mm DA
Humidity	5% to 85% RH
Ambient temperature	-40°C to 70°C
Termination	PCB, Plug-in
Unit weight	Approx. 37g
Construction	Dust protected

Notes: 1) The data shown above are initial values.

COIL

Coil power	DC type: Approx. 0.9W to 1.1W; AC type: Approx. 1.2VA to 1.8VA
------------	---



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

COIL DATA

at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC max. ¹⁾	Drop-out Voltage VDC min.	Max. Voltage VDC ²⁾	Coil Resistance Ω
5	4.0	0.50	5.5	27.5 x (1±10%)
6	4.8	0.60	6.6	40 x (1±10%)
12	9.6	1.20	13.2	160 x (1±10%)
24	19.2	2.40	26.4	650 x (1±10%)
48	38.4	4.80	52.8	2600 x (1±15%)
110	88.0	11.0	121	11000 x (1±15%)

Nominal Voltage VAC	Pick-up Voltage VAC max. ¹⁾	Drop-out Voltage VAC min.	Max. Voltage VAC ²⁾	Coil Resistance Ω
6	4.80	1.80	6.6	11.5 x (1±10%)
12	9.60	3.60	13.2	46 x (1±10%)
24	19.2	7.20	26.4	184 x (1±10%)
48	38.4	14.4	52.8	735 x (1±10%)
120	96.0	36.0	132	4550 x (1±15%)
220/240	176.0	72.0	264	14400 x (1±15%)

Notes: 1) Under ambient temperature, applying more than 80% of rating voltage to coil, relay will take action accordingly. But in order to meet the stated product performance, please apply rated voltage to coil.

2) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.

SAFETY APPROVAL RATINGS

UL/CUL	2 Form C	7A 250VAC/30VDC
	3 Form C 4 Form C	5A 250VAC/30VDC
TÜV	2 Form C 3 Form C	7A 250VAC/30VDC
	4 Form C	5A 250VAC/30VDC

Notes: 1) All values unspecified are at room temperature.

2) Only typical loads are listed above. Other load specifications can be available upon request.

ORDERING INFORMATION

	HF18FF /	A	012	-2Z	1	G	D	(XXX)
Type								
Coil voltage form	A: AC Nil: DC							
Coil voltage	DC: 5VDC to 110VDC	AC: 6VAC to 240VAC						
Contact arrangement	2Z: 2 Form C	3Z: 3 Form C	4Z: 4 Form C					
Mounting Termination (See the following)	1: Socket	2: PCB	5: Flange-Mounting					
Contact material	T: AgSnO ₂ Nil: AgCe	G: AgCe + Au plated TG: AgSnO ₂ + Au plated						
LED	D: With LED	Nil: Without LED						
Special code ²⁾	XXX: Customer special requirement	Nil: Standard						

Notes: 1) We also can supply the special type with terminals numbered 1,4,5,8,9,12,13,14 for 2 poles.

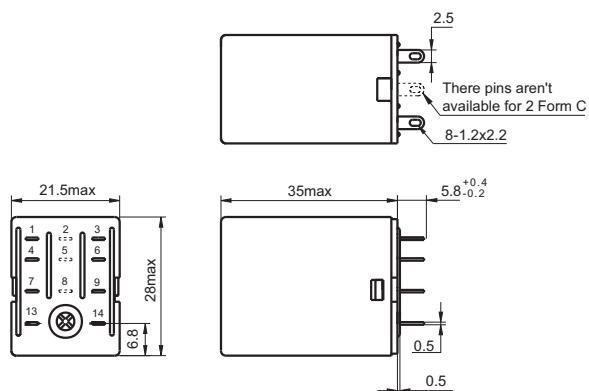
2) The customer special requirement express as special code after evaluating by Hongfa.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

Outline Dimensions


HF18FF/□□□□-2Z1□□/3Z1□□□




HF18FF/□□□□-2Z2□□/ 3Z2□□□

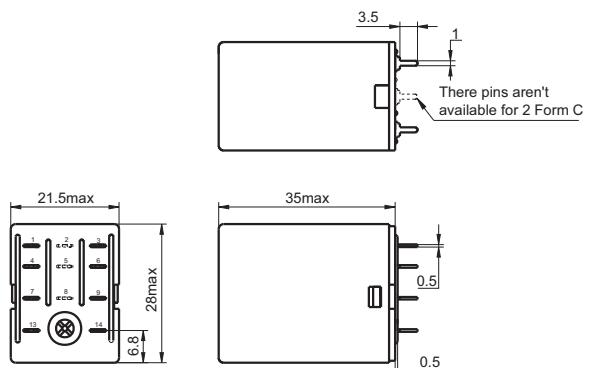

HF18FF/□□□□-4Z1□□□

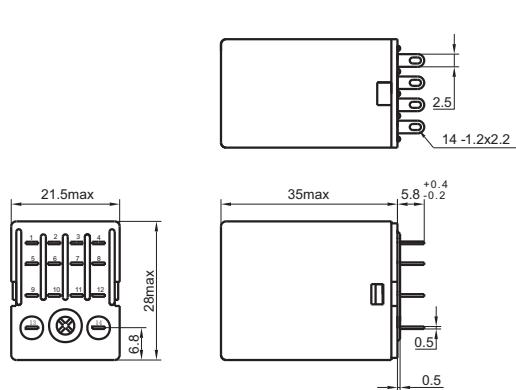

HF18FF/□□□□- 4Z2□□□

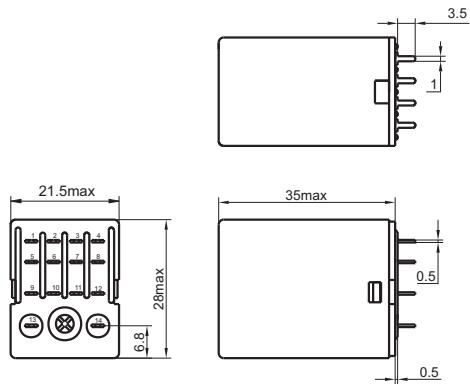


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

HF18FF/□□□□-4Z5□□□

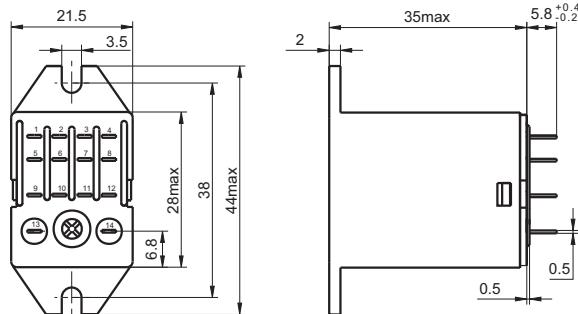
Outline Dimensions




Mounting Holes

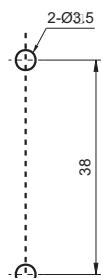


2 Form C



3 Form C



4 Form C

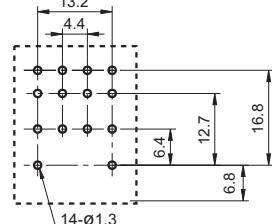


PCB Layout

(Bottom view)


Wiring Diagram

(Bottom view)


2 Form C




3 Form C




4 Form C




2 Form C (With LED)



3 Form C (With LED)




4 Form C (With LED)




Remark: For AC parts with diode, the positive and negative pole markings on wiring diagram are not applicable.


2 Form C
(DC, With fly-wheel diode)



3 Form C
(DC, With fly-wheel diode)




4 Form C
(DC, With fly-wheel diode)




Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.

CHARACTERISTIC CURVES

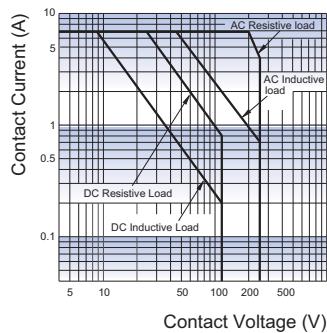MAXIMUM SWITCHING POWER
(2, 3 Form C)



MAXIMUM SWITCHING POWER
(4 Form C)

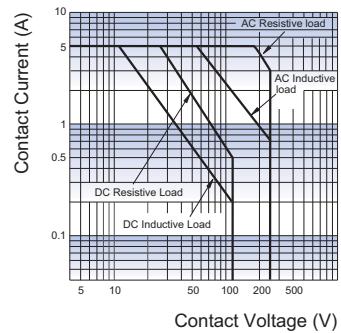

Relay Sockets



Features

- The dielectric strength can reach 2000VAC and the insulation resistance is 1000MΩ
- Three mounting types are available: PCB mounting, screw mounting and DIN rail mounting.
- With finger protection device
- Many kinds of plug-in modules are available with the function of energizing indication and wiring protection.
- Components available: retainer, marker and plug-in module
- Environmental friendly product (RoHS compliant)

















CHARACTERISTICS

Type	Nominal Voltage	Nominal Current	Ambient Temperature	Dielectric Strength min.	Screw Torque	Wire Strip Length
18FF-2Z-A2	250VAC	7A	-40 °C to 70°C	2000VAC	—	—
18FF-2Z-C1	250VAC	7A	-40 °C to 70°C	2000VAC	0.8N · m	7mm
18FF-2Z-C2	250VAC	7A	-40 °C to 70°C	2000VAC	0.8N · m	7mm
18FF-2Z-C4	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-2Z-C5	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-2Z-C8	250VAC	7A	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-2Z-C9	250VAC	7A	-40 °C to 70°C	2000VAC	—	7mm
18FF-3Z-C4	250VAC	7A*/10A*	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-3Z-C5	250VAC	7A*/10A*	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-4Z-A2	250VAC	7A*	-40 °C to 70°C	2000VAC	—	—
18FF-4Z-C1	250VAC	7A*/10A*	-40 °C to 70°C	2000VAC	0.8N · m	7mm
18FF-4Z-C2	250VAC	7A*/10A*	-40 °C to 70°C	2000VAC	0.8N · m	7mm
18FF-4Z-C4	250VAC	7A*/10A*	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-4Z-C5	250VAC	7A*/10A*	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-4Z-C8	250VAC	7A*	-40 °C to 70°C	2000VAC	0.6N · m	7mm
18FF-4Z-C9	250VAC	7A	-40 °C to 70°C	2000VAC	—	7mm

Remark: For sockets marked *, their group of current totally should be not more than 20A.
















OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

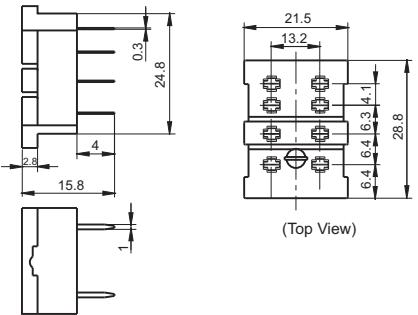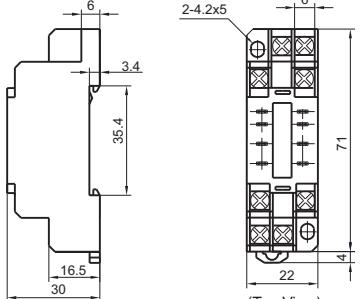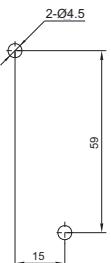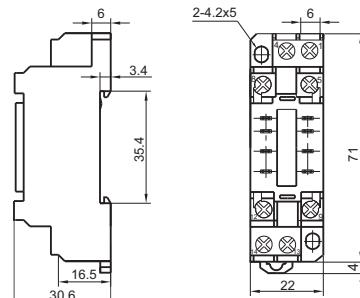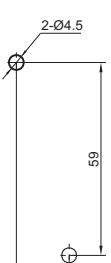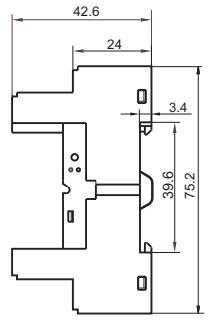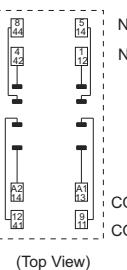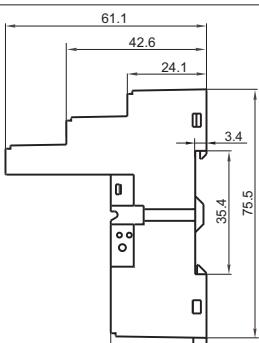Unit: mm

Socket	Outline Dimensions	Wiring Diagram	PCB Layout	Components Available
18FF-2Z-A2 	 (Top View)			metallic retainer 18FF-H1
PCB Terminal, PCB mounting Applicable for 2 poles				
18FF-2Z-C1 	 (Top View)	 (Top View)		metallic retainer 18FF-H2 (be used in sets)
Screw Terminal, DIN rail or Screw mounting, Without finger protection device Applicable for 2 poles				
18FF-2Z-C2 	 (Top View)	 (Top View)		metallic retainer 18FF-H2 (be used in sets)
Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 2 poles				
18FF-2Z-C4 	  (Top View)	 (Top View)		plastic retainer 18FF-H4 metallic retainer 18FF-H5 marker 18FF-M1 plug-in module HFAA to HFHU*
Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 2 poles				
18FF-2Z-C5 	  (Top View)	 (Top View)		plastic retainer 18FF-H4 metallic retainer 18FF-H5 marker 18FF-M1 plug-in module HFAA to HFHU*
Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 2 poles				












OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

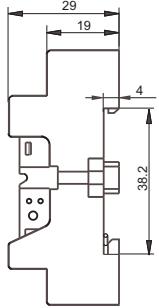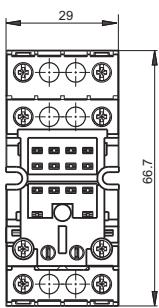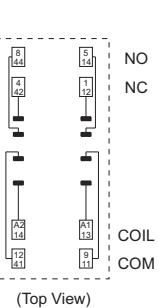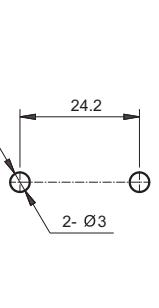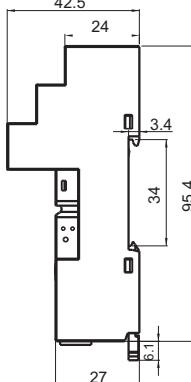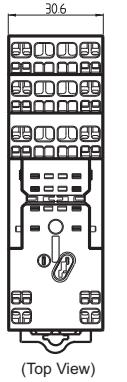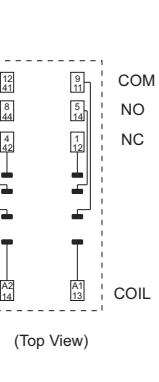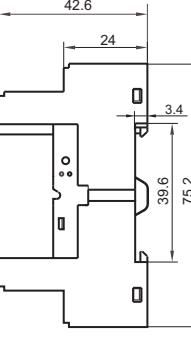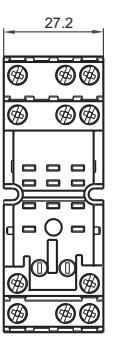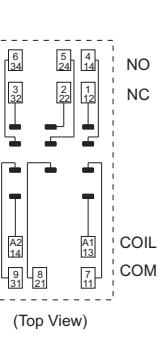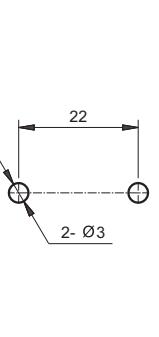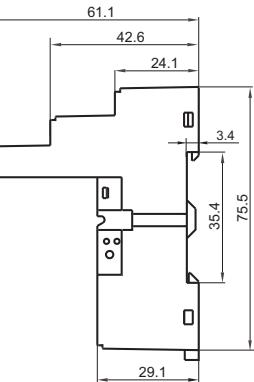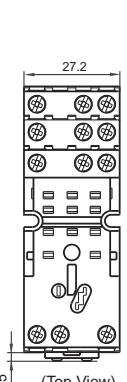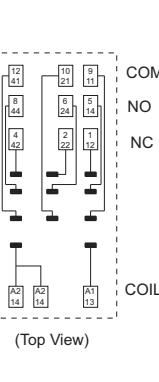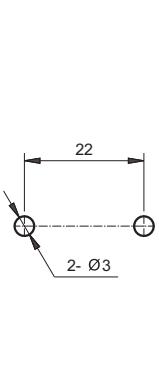Unit: mm

Socket	Outline Dimensions	Wiring Diagram	PCB Layout	Components Available
18FF-2Z-C8 	  <p>(Top View)</p>	 <p>(Top View)</p>		plastic retainer 18FF-H4 marker 18FF-M3
18FF-2Z-C9 	  <p>(Top View)</p>	 <p>(Top View)</p>		plastic retainer 18FF-H4 metallic retainer 18FF-H5 plug-in module HFAA ~ HFHU* marker 18FF-M3
18FF-3Z-C4 	  <p>(Top View)</p>	 <p>(Top View)</p>		plastic retainer 18FF-H4 metallic retainer 18FF-H5 marker 18FF-M1 plug-in module HFAA to HFHU*
18FF-3Z-C5 	  <p>(Top View)</p>	 <p>(Top View)</p>		plastic retainer 18FF-H4 metallic retainer 18FF-H5 marker 18FF-M1 plug-in module HFAA to HFHU*









OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

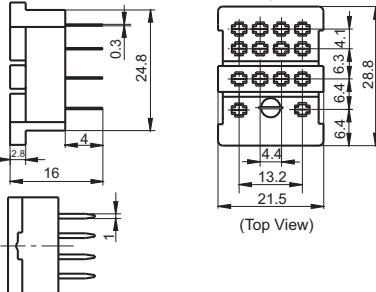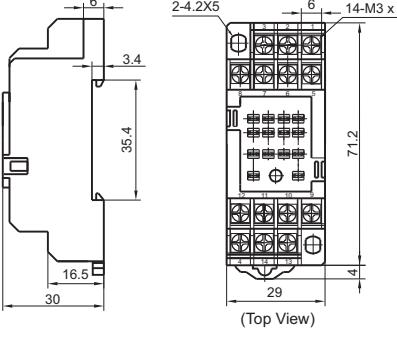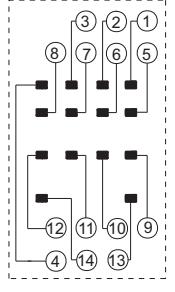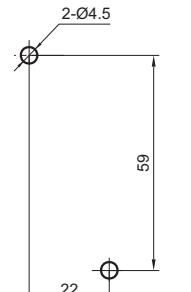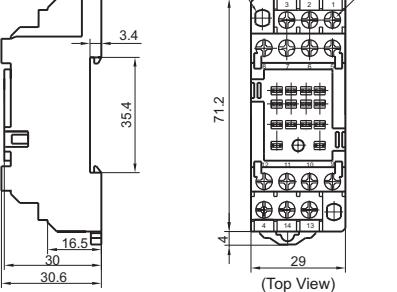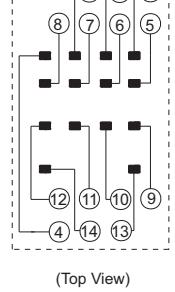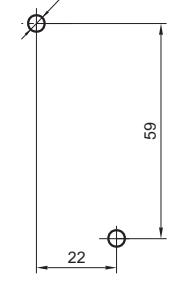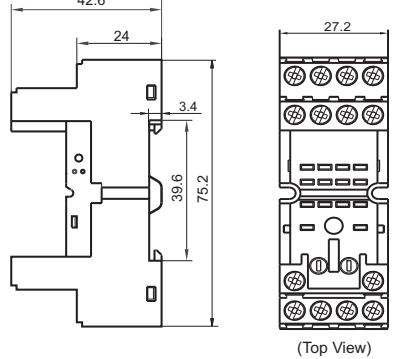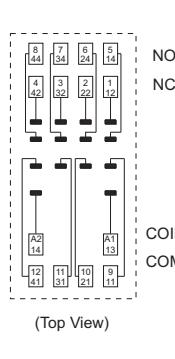Unit: mm

Socket	Outline Dimensions	Wiring Diagram	PCB Layout	Components Available
18FF-4Z-A2	 		 	metallic retainer 18FF-H1
18FF-4Z-C1	 			metallic retainer 18FF-H2 (be used in sets)
18FF-4Z-C2	 			metallic retainer 18FF-H2 (be used in sets)
18FF-4Z-C4	 			plastic retainer 18FF-H4 metallic retainer 18FF-H5 marker 18FF-M1 plug-in module HFAA to HFHU*

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

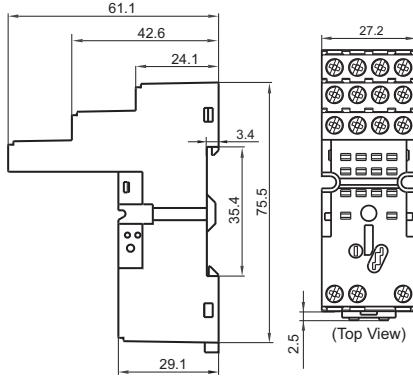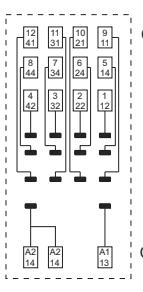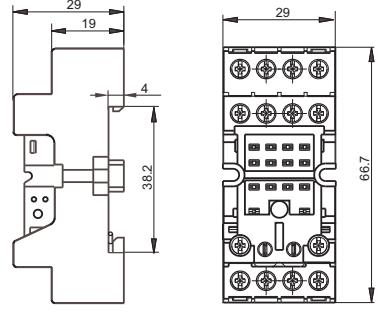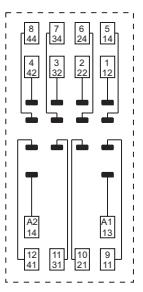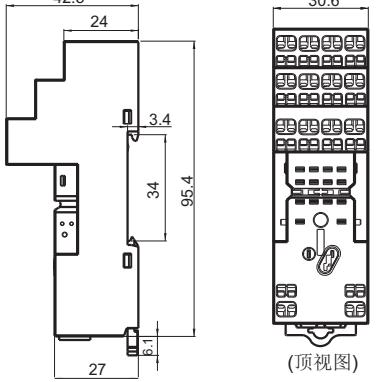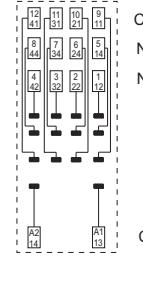Unit: mm

Socket	Outline Dimensions	Wiring Diagram	PCB Layout	Components Available
18FF-4Z-C5	  <p>Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 4 poles</p>	 <p>(Top View)</p> <p>COM NO NC COIL</p>	 <p>22 2 - Ø3</p>	plastic retainer 18FF-H4 metallic retainer 18FF-H5 marker 18FF-M1 plug-in module HFAA to HFHU*
18FF-4Z-C8	  <p>Screw Terminal, DIN rail or Screw mounting, With finger protection device Applicable for 4 poles</p>	 <p>(Top View)</p> <p>NO NC COIL COM</p>	 <p>24.2 2 - 3 Ø</p>	plastic retainer 18FF-H4 marker 18FF-M3
18FF-4Z-C9	  <p>Spring-loaded terminal DIN rail mounting With finger protection device Applicable for 2 poles</p>	 <p>(顶视图)</p> <p>COM NO NC COIL</p>		塑料卡簧 18FF-H4 金属卡簧 18FF-H5 插入式模块 HFAA ~ HFHU* 标识板 18FF-M3

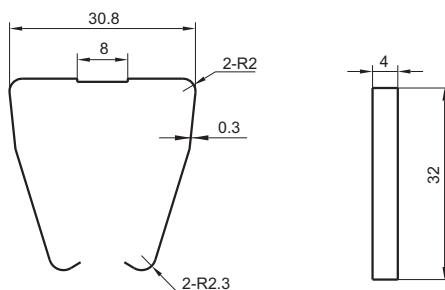
Notes: * Please refer to the product datasheet if plug-in module is required.

DIMENSION OF RELATED COMPOENT (AVAILABLE)


Unit: mm

Retainer

18FF-H1 (Metallic retainer)



18FF-H2 (Metallic retainer)

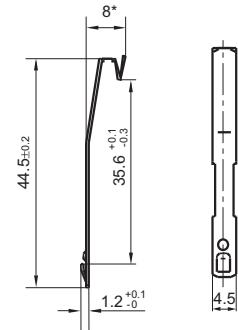


Note: 18FF-H2 retainer has to be used in sets, please pay special attention while placing the order.

DIMENSION OF RELATED COMPOENT (AVAILABLE)


Unit: mm

Retainer

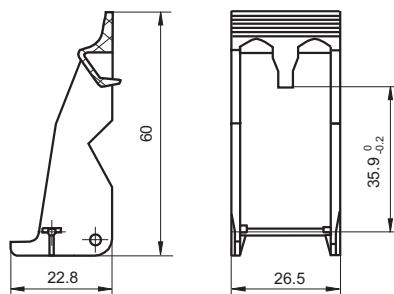18FF-H4 (Plastic retainer)



18FF-H5 (Metallic retainer)

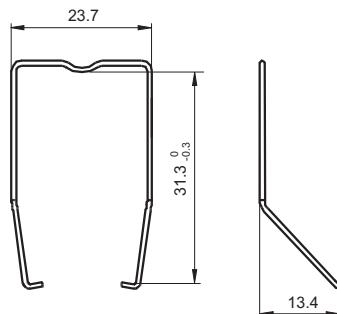


DIMENSION OF RELATED COMPOENT (AVAILABLE)


Unit: mm

Marker

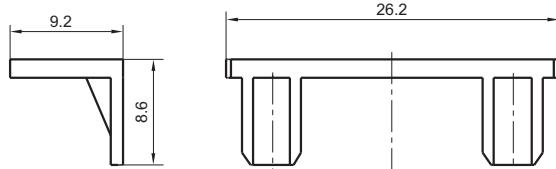18FF-M1



18FF-M3

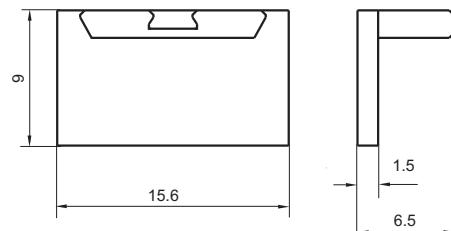

Things to be noticed when selecting sockets:

1. Please choose suitable relay socket according to the actual mounting environment, relay contact poles and terminal layout. If there is any query on selection, please contact Hongfa for the technical service.
2. Socket which can be mounted with markers is furnished with a marker; as for other related components, they should be selected separately. Please do give clear indication of the types of relay sockets and related components you choose while placing order.
3. The above is only an example of typical socket and related component type which is suitable to HF18FF relay. If you have any special requirements, please contact us.
4. Main outline dimension(L, W, H) $\geq 50\text{mm}$, tolerance should be $\pm 1\text{mm}$; outline dimension $>20\text{mm}$ and $<50\text{mm}$, tolerance should be $\pm 0.5\text{mm}$; outline dimension $\leq 20\text{mm}$, tolerance should be $\pm 0.3\text{mm}$.
5. DIN rail mounting: recommend to use standard rail $35 \times 7.5 \times 1$, $35 \times 15 \times 1$.

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.