

Combined Motion and Presence Detector for Automatic Sliding Doors GUARDIAN 1

CARLO GAVAZZI



- Overhead sensor for sliding doors
- Motion and presence detection in one unit
- Digital Video Camera Technology
- Easy teach of presence zone
- Environmental adaptation
- No Crosstalk between sensors
- Separate motion and presence output
- 2 x SPST relay outputs
- Supply voltage: 12 to 24 VAC/DC
- LED indication for: Power, Motion and Presence
- CE, UL325 and TÜV approved



Product Description

The GUARDIAN 1 is an overhead sensor for pedestrian sliding doors. The sensor has combined motion and presence (safe) detection zones. The sensor is based on CMOS camera technology and detection on image processing. The motion zone reacts only on movement whereas the presence zone reacts on both movement and presence. The motion zone can be blanked in 3 directions (front, left and

right) in order to avoid detection of unwanted objects.

The presence zone is taught into the sensor by recognition of some standard test targets in the setup phase. The presence zone also adapts to the surroundings to work in different weather conditions. The sensor has separate outputs for the motion and presence zones as well as a test input to test the sensor function for each door cycle.

Ordering Key

GUARDIAN 1

Type Selection

Housing size

210 x 77 x 58 mm



Ordering no.

GUARDIAN1


Specifications

Rated operational voltage (U _e)	12 - 24 VAC (12 - 24 VCA) RMS incl. ripple 50-60 Hz, ±15% tolerance 12 - 24 VDC (12 - 24 VCC) ±15% tolerance			Active low:	ON < 6 VAC/VDC OFF > 9 VAC/VDC
				Sensitivity	Adjusting in 7 steps
No load supply current (I _e)	Typical 192 mA 146 mA 103 mA 65 mA	Max. 230 mA 170 mA 120 mA 80 mA	@ 12V AC @ 12V DC @ 24V AC @ 24V DC	Presence zone reaction time	210 ms (20% contrast, object speed 1 m/s, test body CA (DIN18650-1)) 500 ms
				Reaction time:	
				Fall time:	
Technology	Digital video camera technology			Motion zone reaction time	
				Reaction time:	1,2 s (20% contrast, object speed 1 m/s, test body CA (DIN18650-1))
Power ON delay	5 seconds			Fall time:	500 ms
Output function				Presence time	
Safety and Motion Zone	Relay – SPST			(Background relearn time)	7 step rotary switch
Common relay data:	1A DC 30VDC			In accordance with DIN18650	1 min, 5 min.
Operations minimum	600.000 @ 0,5A, 50 VAC/ 30 VDC			Not in accordance with DIN18650	10 sec, 30 sec.
Operations minimum	100.000 @ 1A, 30 VDC				
Test input				Vibration	10 to 150 Hz 0.5 mm/7.5g (IEC 60068-2-6)
Active high:	Max. input current 5 mA ON > 9 VAC/VDC OFF < 6 VAC/VDC			Shock	2 x 1 m and 100 x 0.5 m (IEC 60068-2-32)


Specifications (cont.)

Ambient temperature range Operating Store	-25° to +55°C (-13° to +131°F) -25° to +80°C (-13° to +176°F)	Pollution degree	3 (IEC 60664 / 60664A / EN 60947-1)
Ambient light	10 lux - 50.000 lux 40 lux - 50.000 lux, TÜV approved, measured at the sensor surface	Humidity	0 % to 90 % relative, non condensing
Contrast	Min. 20% contrast between the floor and object	Type of ESPE Type 2	The sensing functions have to be tested for each door cycle by applying a test signal to the terminals 2+3. See test input.
Motion zone sensing area Height 180 cm Height 220 cm Height 300 cm	(W x D) 246 x 204 cm 300 x 249 cm 410 x 340 cm The motion area can be blanked from left, right and front in 7 steps on three rotary switches	LED indications Green LED Yellow LED Red LED	Power ON Motion detected Presence detected For special LED functions see page 3
Presence zone sensing area Height 180 cm Height 220 cm Height 300 cm	(W x D) 42 cm x door width 51 cm x door width 70 cm x door width	Rated Insulation voltage	50 VDC
Mounting height	1.8 m to 3.0 m	Weight	460 g
Placement of sensor Horizontal distance from door Vertical distance from door	max 50 cm in front of the door. The sensor must be able to see the door opening. 10 cm from the top of the door opening	Electromagnetic compatibility	In acc. with EMC directive 2004/108/EG Immunity in acc. with EN61326-1 and EN61326-3-1
Material Housing and cover Front glass	ABS Black Clear transparent, polycarbonate.	Marking	CE
Connection cable	3 m 8 x 0,14 mm ² LIYY grey Max. cable length: 10 m.	TÜV-Approval  Baumuster geprüft	In acc. with machinery directive 2006/42/EC, annex I DIN 18650-1 § 5.7.4, edition 2005 (prEN16005), EN13241-1, EN 12978, edition 2003, EN61508, edition 2001, ENISO13849-1: 2008 cat.2 pl. c for presence detection
Environment protection	IP64 (EN 60529, 60947-1)	UL-Approval 	UL325, CSA-C22.2 No.247
Installation category	III (IEC 60664 / 60664A / EN 60947-1)		


Operation Diagram

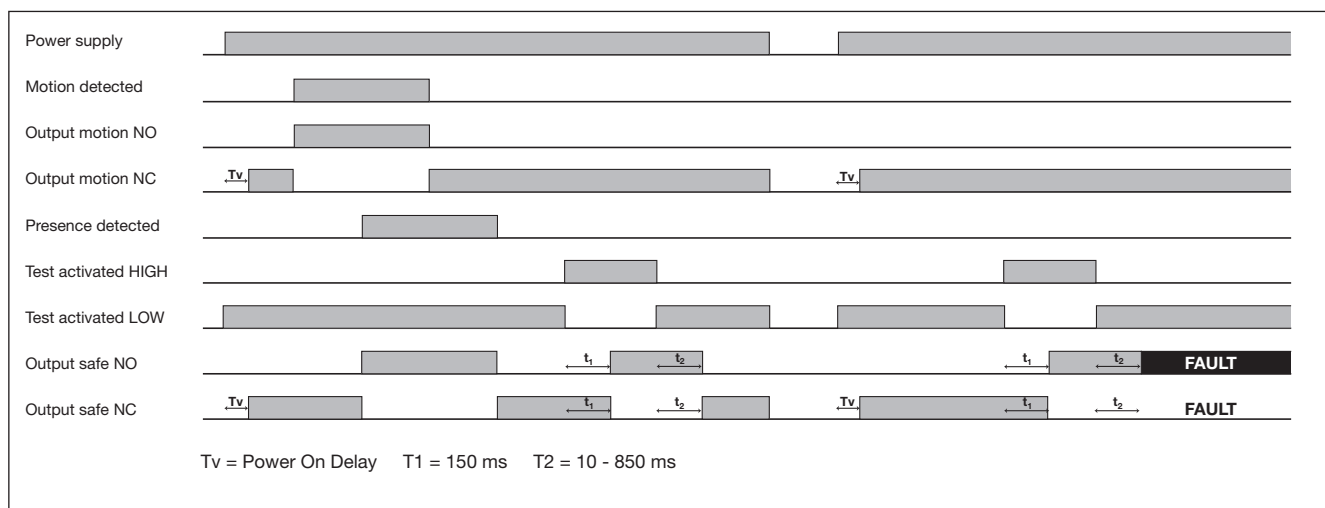

Component Guide

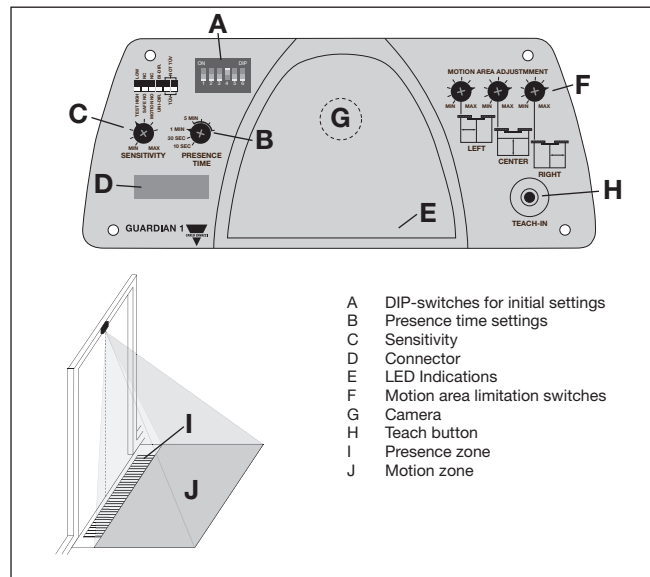

Dimensions

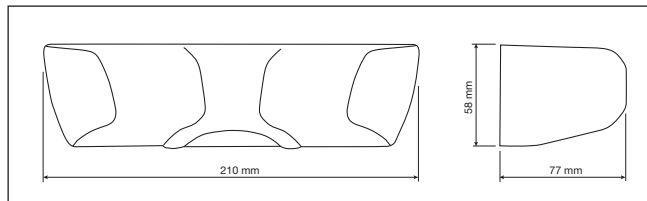

LED Indications

Situation / LED	Yellow	Red	Green
Normal	Motion detected	Presence detected	Power On
No presence zone stored	Running light on all LED's		
Teach mode	Flashing simultaneously		
Background stored	Off	Off	Flashing
Not allowed DIN18650	Off	Flashing	On
Self test failed	Flashing simultaneously		On
Sensor error Contact installer	On	On	Off

Delivery Contents

- GUARDIAN1 door sensor
- User Manual
- Drilling template
- 3 m connection cable with connector
- **Packaging:** Cardboard box

DIP-Switch Settings

Set up the DIP-switches to match the door controller.

DIP-switch 1 - Sensor test input

- ☐ Test input Active Low
- ☐ Test input Active High

DIP-switch 2 - Safety output


- ☐ Normally closed (NC)
- ☐ Normally open (NO)

DIP-switch 3 - Motion output

- ☐ Normally closed (NC)
- ☐ Normally open (NO)

DIP-switch 4 - Direction recognition


- ☐ Bi-directional mode
- ☐ Uni-directional mode)

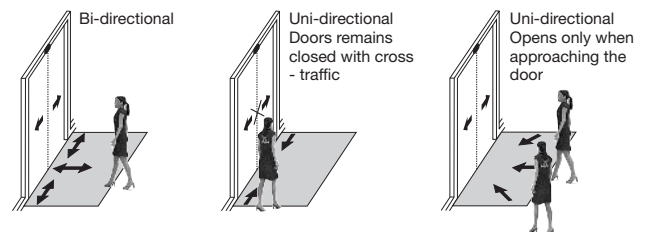

DIP-switch 5 and 6

- ☐ Not in accordance with DIN18650-1 (prEN16005)
- ☐ In accordance with DIN18650-1 (prEN16005)
- ☐ Not valid (red LED flashes and output relays is set in safe mode)

Wiring Diagram

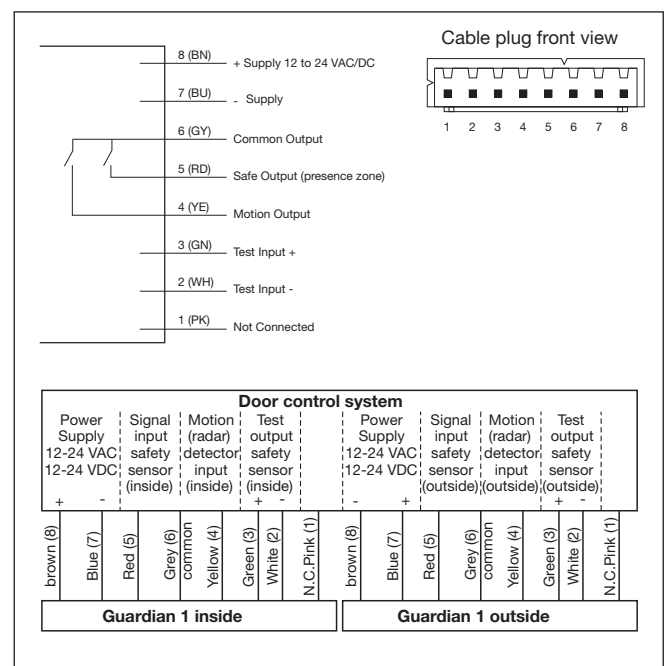

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Carlo Gavazzi:](#)

[GUARDIAN1](#)