



Spliced Double-Head Crimping Quick Wiring Connector Series




*The number of digits can be infinitely spliced as needed


Electrical performance & Material

Model	FD-12/13/(T)(A)
Pole	1P to 2P(or 3P)
Rated voltage	250V
Rated current	32A
Strip length	8-10mm/0.37in
Wiring size	Solid:0.08~4.0mm ² /12~28AWG Strand:0.08~2.5mm ² /12~28AWG
Wiring method	Lever Crimp
shell	Nylon66 / PC
Contact	Copper tin plating
Spring	High-performance spring steel
Temperature	-25°C~85°C
Applications	Construction, home improvement, junction box, lamp lighting, motor, power supply

Product Appearance Size(mm)

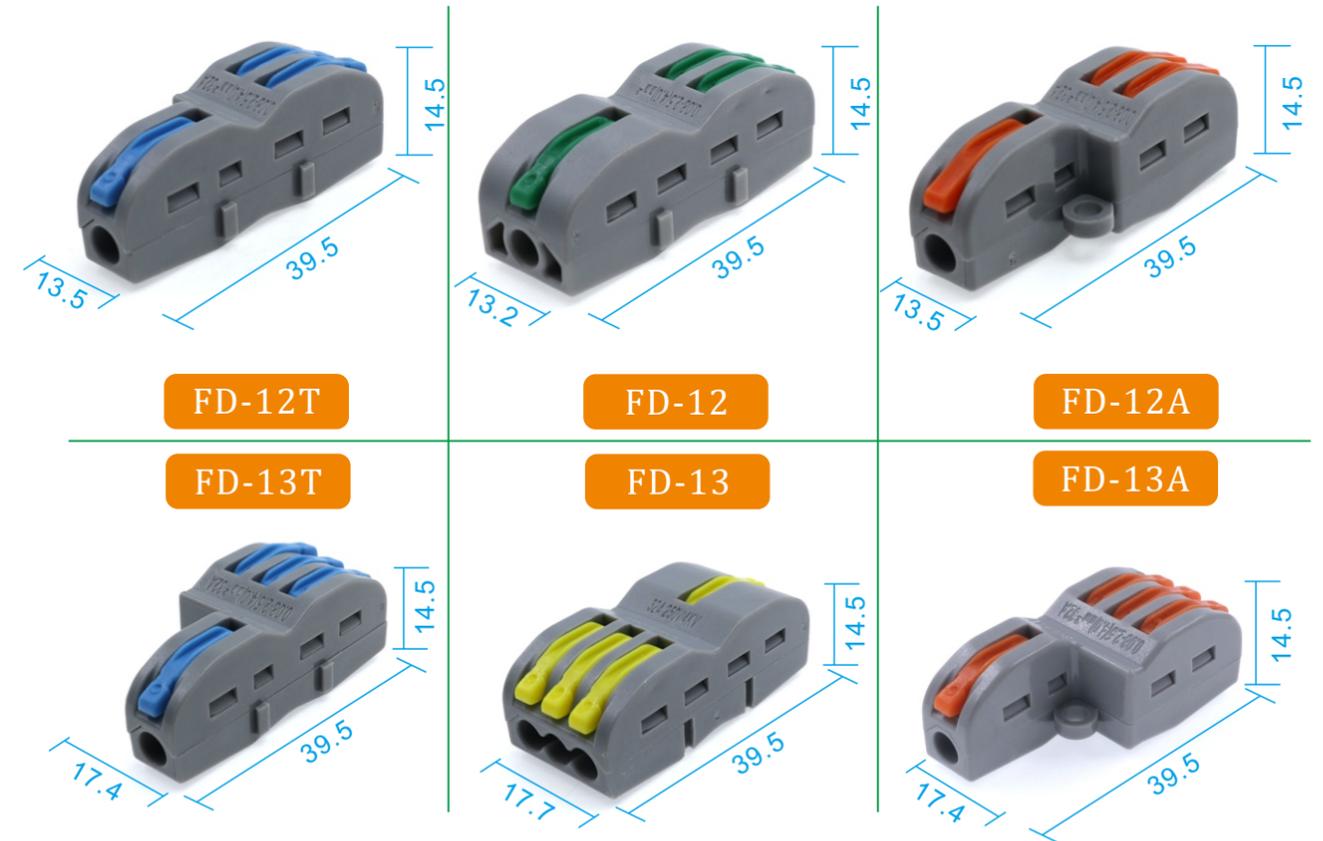

How To Use

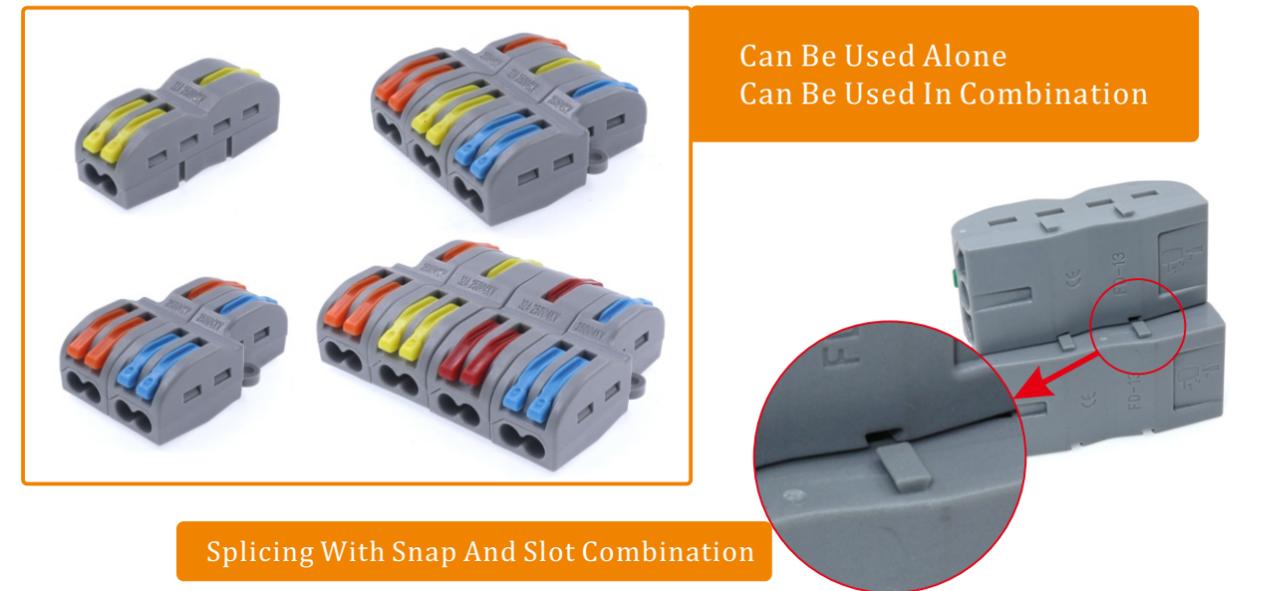

Can Be Used Alone
Can Be Used In Combination

Splicing With Snap And Slot Combination