

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

1

2

A

FIRST ISSUE

28FEB2010

AV

GT

AI



REVISED PER ECR-13-009678

18SEP2013

RS

DD



TYPICAL APPLICATION

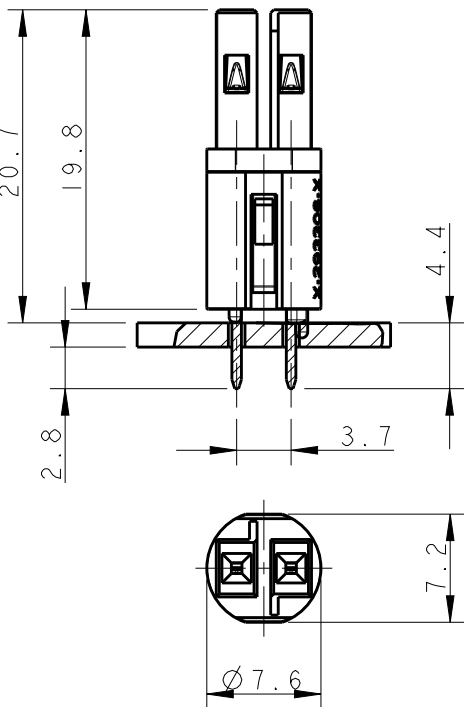

HIGH VOLTAGE





KEYING HV-2

KEYING HV-3





KEYING HV-4

KEYING HV-5



LOW VOLTAGE

KEYING LV-2




MATERIALS:

- 1) CONTACTS: SOLDERING SIDE TIN PLATED Ph. BRONZE
RECEPTACLE IN SPECIAL ALLOY COPPER TIN PLATED
HOUSING: PBT 15%GFF UL 94 V0 COLOR WHITE

2 P/N 293655-1 POLARIZATION KEY HV-2
TO BE USED FOR FOR SWITCH APPLICATION ONLY


PRINTED CIRCUIT BOARD LAYOUT
FOR HIGH VOLTAGE VERSION

TOLERANCES UNLESS OTHERWISE SPECIFIED ± 0.05
PRINTED CIRCUIT BOARD THICKNESS: 1.6 mm NOMINAL

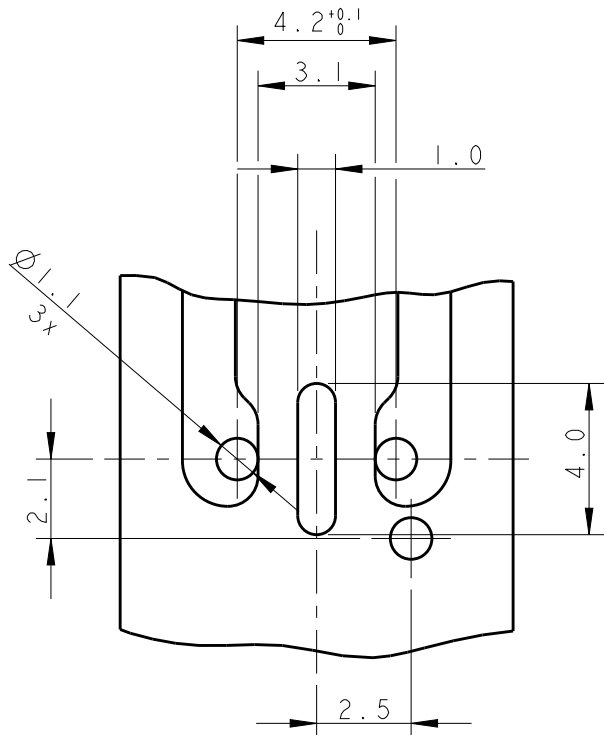

PRINTED CIRCUIT BOARD LAYOUT
FOR LOW VOLTAGE VERSION


TOLERANCES UNLESS OTHERWISE SPECIFIED ± 0.05
PRINTED CIRCUIT BOARD THICKNESS: 1.6 mm NOMINAL

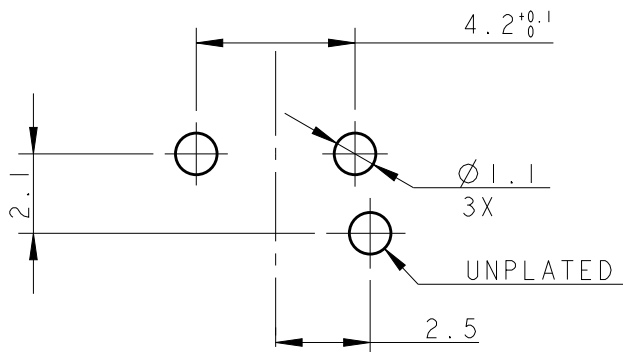

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± 0.5
1 PLC ± 0.5
2 PLC ± 0.3
3 PLC ± 0.3
4 PLC ± 0.3
ANGLES $\pm 0.5^\circ$

FINISH

DWN 18FEB2010

A. Vecchia

CHK 18FEB2010

G. Turco

APVD 18FEB2010

G. Turco

PRODUCT SPEC

108-20294

APPLICATION SPEC

114-32102

WEIGHT

-

Customer Drawing



TE Connectivity

NAME
7,5 mm PCB CONNECTOR ASSEMBLY
STRAIGHT FEMALE VERSION
FOR USA MARKET

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A300779 C-293655

SCALE 5:1

SHEET 1 OF 1

REV AI

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[293655-4](#)