



Heavy duty wirewound potentiometers

Series 30 W

Type 30 W

Ordering code no.: 31 211

Basic design: high load, nominal width 46 mm, solder tag terminals

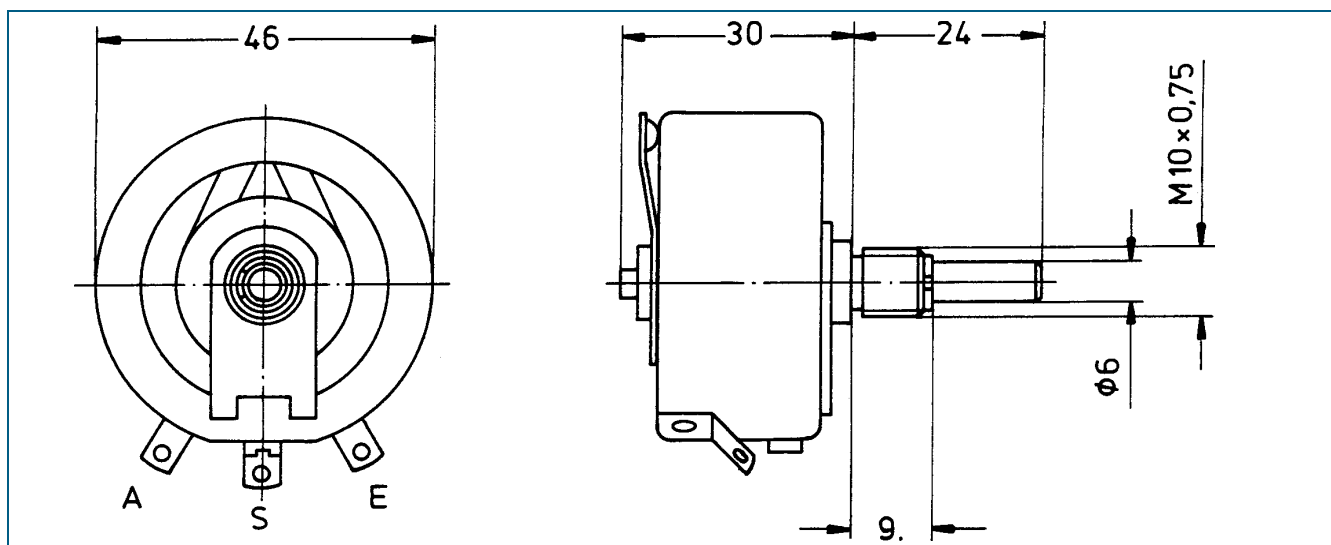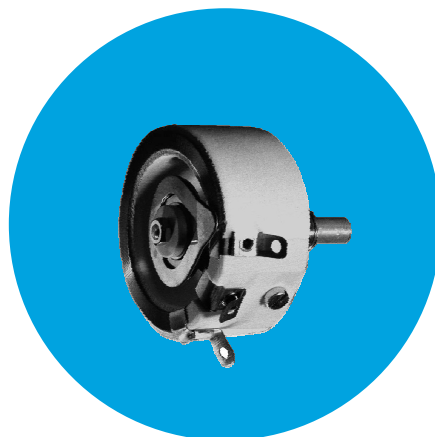

Technical data

Rated resistance range	4.7 Ω - 4.7 k Ω *	Isolation voltage	2000 V eff
Resistance tolerance	$\pm 10\%$, (5 %, 2 %)	Electrical travel	270°
Law (resistance taper)	lin, lg on request	Mechanical travel	287°
Rated dissipation	30 W / 40 °C	Weight	approx. 70 g / piece

*higher values on request

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[AVX:](#)

[3191102500](#) [3191102600](#) [3191103900](#) [3191106600](#) [3191106750](#) [3191106800](#) [3191106825](#) [3191106900](#)
[3191106950](#) [3121106800](#) [3121106825](#) [3121106900](#) [3121106950](#) [3121106750](#) [3121106600](#) [3121103900](#)
[3121102600](#) [3121102500](#)