




Heavy duty wirewound potentiometers

Series 60 W

Type 60 W

Ordering code no.: 31 212

Basic design: high load, nominal width 53 mm, solder tag terminals

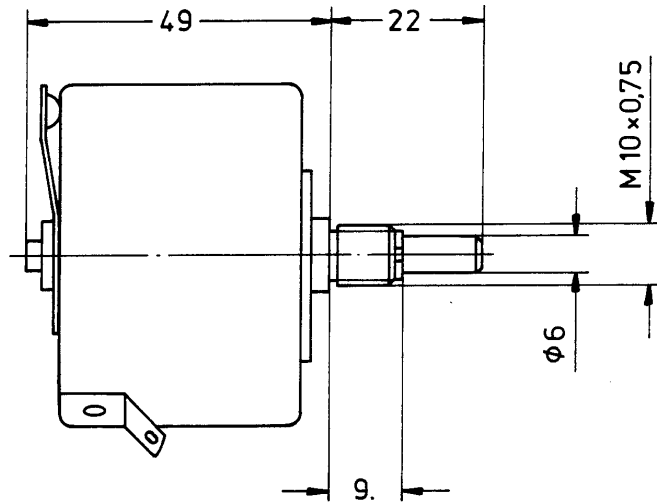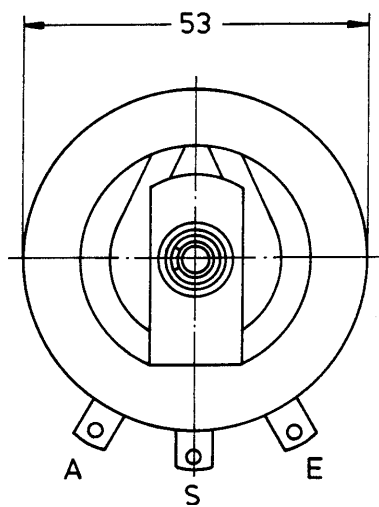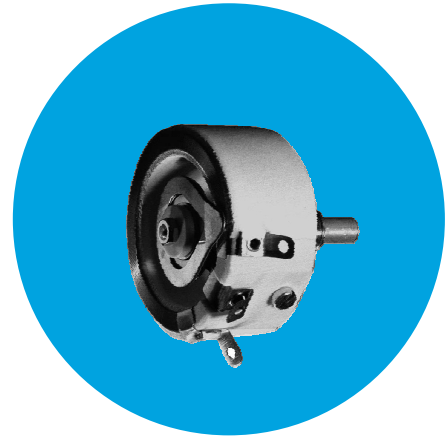

Technical data

Rated resistance range	4.7 Ω - 4.7 kΩ *	Isolation voltage	2000 V eff
Resistance tolerance	± 10 %, (5 %, 2 %)	Electrical travel	262°
Law (resistance taper)	lin, lg on request	Mechanical travel	282°
Rated dissipation	60 W / 40 °C	Weight	approx. 160 g / piece

*higher values on request

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kyocera AVX:

[3191204400](#) [3191204600](#) [3191205901](#) [3191205903](#) [3191205905](#) [3191205912](#) [3191205950](#) [3191205965](#)
[3191206000](#) [3191206050](#) [3121206050](#) [3121206000](#) [3121205965](#) [3121205950](#) [3121205912](#) [3121205905](#)
[3121205903](#) [3121205901](#) [3121204600](#) [3121204400](#)