


PAGE 1/1	ISSUE <b>04-06-13</b>	SERIES <b>LC</b>	PART NUMBER <b>F727751100</b>
----------	-----------------------	------------------	-------------------------------

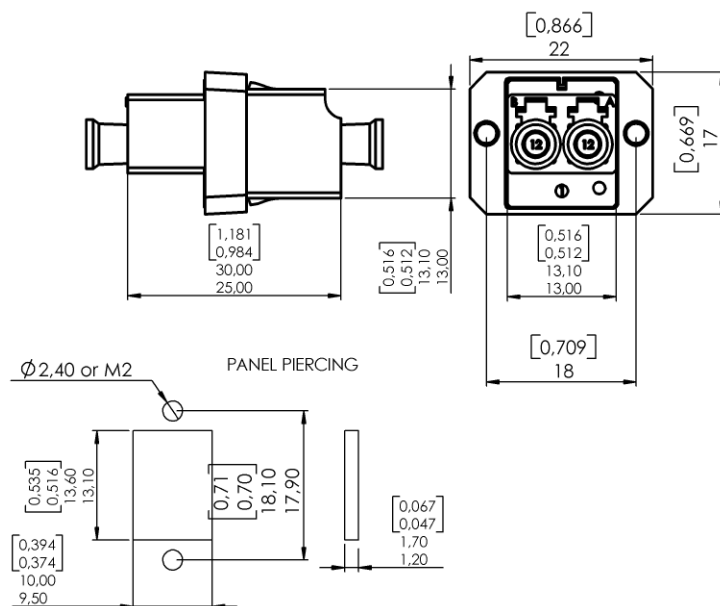

Dimensions: mm [inches]

## GENERAL

**Type:** IEC 61754-20 (LC)

**Mounting:** SC panel cut-out screw in  
(max. panel thickness 1.7mm)

**Alignement Sleeve:** Zirconia

**Color:** GREEN

## CHARACTERISTICS (Dependent on cable or fiber construction)

**Material:**

Plastic molded : Material in accordance with  
TELCORDIA GR-326 CORE  
Inflammability V0 (UL 94)

**Mechanical:**

Endurance : 200 matings  
Plug retention: 68N

**Environmental:**

Storage temperature range: -40°C / +85°C  
Operating temperature range: -40°C / +70°C

**Proof test :**

Straight pull: 68 N  
Side pull: 23 N

**Vibration test :** 10 to 55 Hz, 1,5 mm (peak to peak), 2 Hr/axis

(Performance and specification: see document **GEN\_F727 001**)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[F727751100](#)