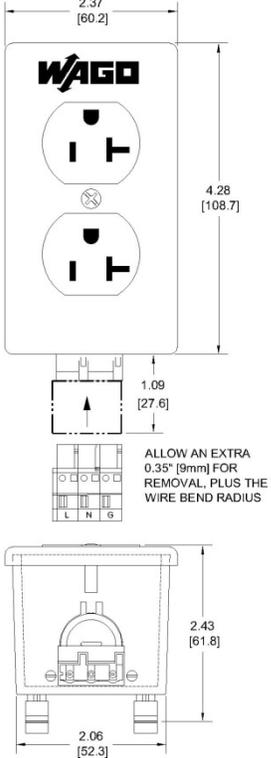


**8002-0025/K050-0613/0000-5400**

																													
<b>Description</b>	<table border="1"> <thead> <tr> <th>WAGO Ref .</th> <th>Designation</th> <th>Pack. Unit</th> </tr> </thead> <tbody> <tr> <td>51012218</td> <td>8002-0025/K050-0613/0000-5400</td> <td>1</td> </tr> </tbody> </table>	WAGO Ref .	Designation	Pack. Unit	51012218	8002-0025/K050-0613/0000-5400	1																						
WAGO Ref .	Designation	Pack. Unit																											
51012218	8002-0025/K050-0613/0000-5400	1																											
<b>Features</b> <ul style="list-style-type: none"> <li>Designed to easily add an AC receptacle to a control panel.</li> <li>Robust 35mm DIN rail mounting feet provide a pull-resistant grip to the DIN rail.</li> <li>RoHS compliant.</li> <li>The case-mounted series 723 male connector allows pre-wiring of the included mating series 721 Cage Clamp® female connector.</li> <li>The insulated, flame-retardant housing provides enhanced safety.</li> <li>External overload protection is recommended.</li> <li>Note: This device must be mounted inside an approved electrical enclosure. Install and ground per applicable codes.</li> </ul>	<b>Technical Data</b> <table border="1"> <tbody> <tr> <td>Operating voltage</td> <td>125 VAC</td> </tr> <tr> <td>Maximum current</td> <td>20 Amps</td> </tr> <tr> <td>Maximum motor load</td> <td>1HP</td> </tr> <tr> <td>Max. Interrupting capacity</td> <td>10,000 Amps</td> </tr> <tr> <td>Wire connections</td> <td>Cage Clamp 0.08mm<sup>2</sup> 2.5mm<sup>2</sup>/ AWG 28-12</td> </tr> <tr> <td>Stripped wire length</td> <td>8-9mm / 0.31-0.35"</td> </tr> <tr> <td>Dimensions (mm) W x H x L (height from upper-edge of DIN rail)</td> <td>60.2 x 62.2 x 108.7+</td> </tr> <tr> <td>Minimum temperature</td> <td>-40°C (without impact)</td> </tr> <tr> <td>Operating temperature</td> <td>-20°C to 60°C</td> </tr> <tr> <td>Safety:</td> <td></td> </tr> <tr> <td>Receptacle</td> <td>c-UL 498 LISTED</td> </tr> <tr> <td>Housing (thermoplastic)</td> <td>UL 2-HR-W-C LISTED</td> </tr> <tr> <td>Cover (polycarbonate)</td> <td>c-UL LISTED</td> </tr> <tr> <td>Terminals (PA 6.6 body)</td> <td>UL 1977 recognized, CSA EN 60664-1</td> </tr> </tbody> </table>	Operating voltage	125 VAC	Maximum current	20 Amps	Maximum motor load	1HP	Max. Interrupting capacity	10,000 Amps	Wire connections	Cage Clamp 0.08mm <sup>2</sup> 2.5mm <sup>2</sup> / AWG 28-12	Stripped wire length	8-9mm / 0.31-0.35"	Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	60.2 x 62.2 x 108.7+	Minimum temperature	-40°C (without impact)	Operating temperature	-20°C to 60°C	Safety:		Receptacle	c-UL 498 LISTED	Housing (thermoplastic)	UL 2-HR-W-C LISTED	Cover (polycarbonate)	c-UL LISTED	Terminals (PA 6.6 body)	UL 1977 recognized, CSA EN 60664-1
Operating voltage	125 VAC																												
Maximum current	20 Amps																												
Maximum motor load	1HP																												
Max. Interrupting capacity	10,000 Amps																												
Wire connections	Cage Clamp 0.08mm <sup>2</sup> 2.5mm <sup>2</sup> / AWG 28-12																												
Stripped wire length	8-9mm / 0.31-0.35"																												
Dimensions (mm) W x H x L (height from upper-edge of DIN rail)	60.2 x 62.2 x 108.7+																												
Minimum temperature	-40°C (without impact)																												
Operating temperature	-20°C to 60°C																												
Safety:																													
Receptacle	c-UL 498 LISTED																												
Housing (thermoplastic)	UL 2-HR-W-C LISTED																												
Cover (polycarbonate)	c-UL LISTED																												
Terminals (PA 6.6 body)	UL 1977 recognized, CSA EN 60664-1																												