


BS88, IEC269 Industrial HRC Fuse Links

Centre Bolted Tags 415V ac and 550V ac for Motor Rated


EF

Time-Current Characteristic Curves


Non Motor Rated

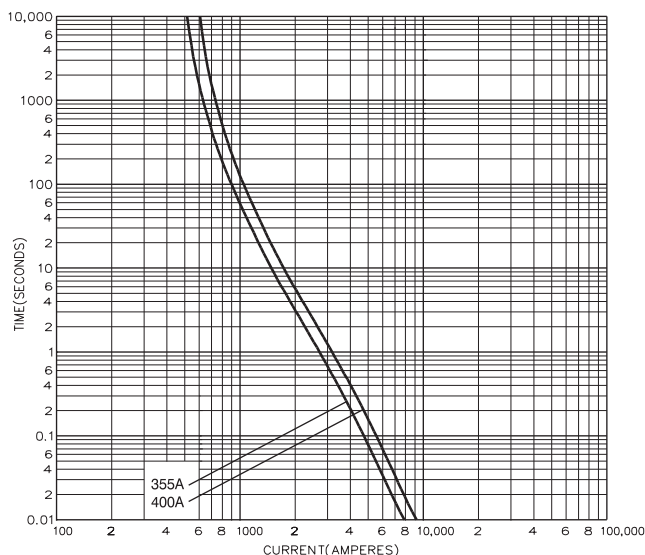


Motor Rated

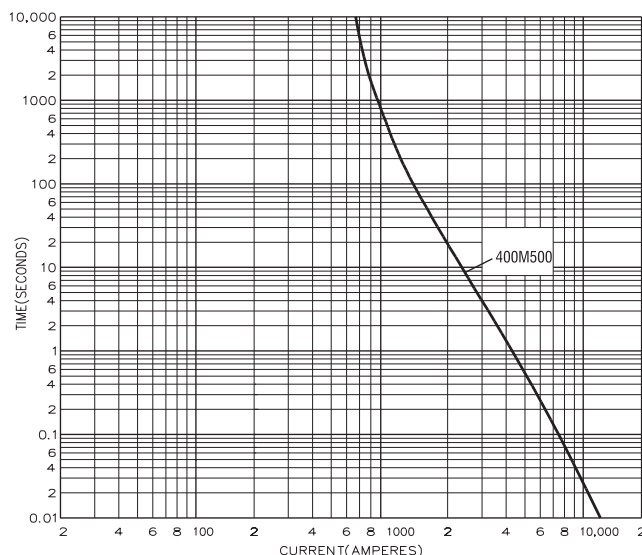

Dimensional Data

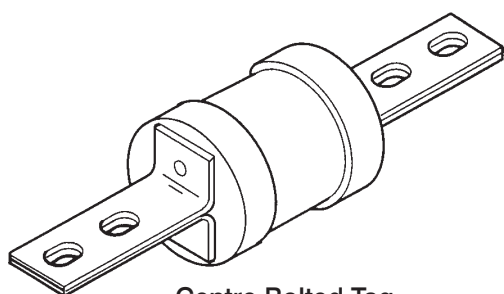

Centre Bolted Tag

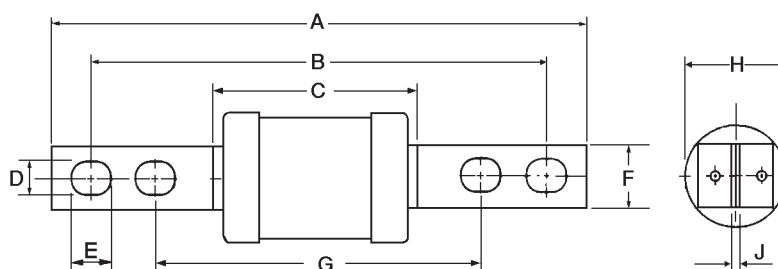

Catalog Number	I²t (Amps² Secondsx 10³)			Nom. Watts Loss	Rated Voltage	Dimensions (mm)								
	Amp Ratings	Pre-Arcing	Total at 415V			A	B	C	D	E	F	G	H	J
EF355	355	360	865	24	415 ac	209.0	184.0	50.0	10.5	12.5	25.4	133.0	38.0	4.7
EF400	400	475	1,150	29										
EF400M500	400M500	1,200	2,700	27	550 ac	210.0	187.0	75.0		15.5		136.0	59.0	

Packaging - 1 per carton

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Bussmann Division Cooper (U.K.) Ltd

Burton-on-the-Wolds
Leicestershire, LE12 5TH
United Kingdom
Tel: (44) (0)1509 88 27 37
Fax: (44) (0)1509 88 27 86

Head Office

St. Louis, MO, U.S.A. Tel: (314) 527-3877 Fax: (800) 544-2570 International Fax: (314) 527-1445



Bussmann Information Fax (00 1) 314 527 1450
Bussmann WEB site - <http://www.bussmann.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Eaton:](#)

[EF355](#) [EF400](#) [EF400M500](#) [EFS315](#)