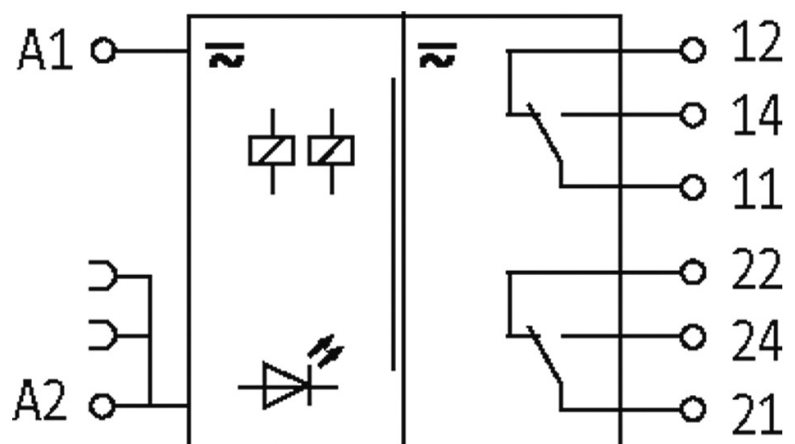





**MIRO 12.4 24V-2U OUTPUT RELAY**

IN: 24 VAC/DC - OUT: 250 VAC/DC / 6 A

2 NO/NC contacts  
24 V AC/DC  
Screw terminals

When the max. switching voltage/current is exceeded the gold plating is destroyed. The relay will then take on the properties of an output type.

[Link to Product](#)**Illustration**

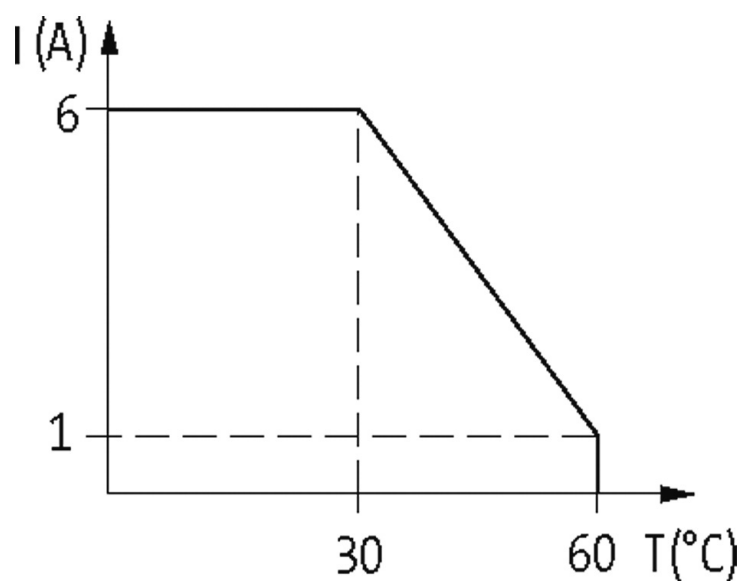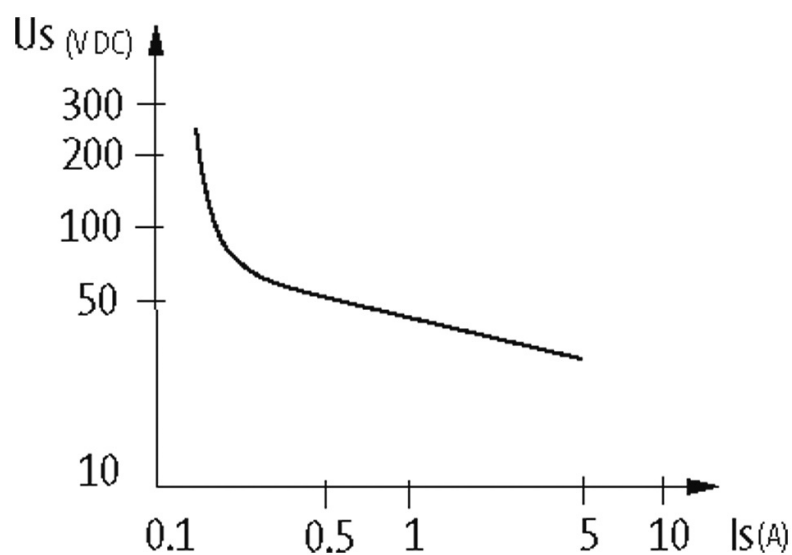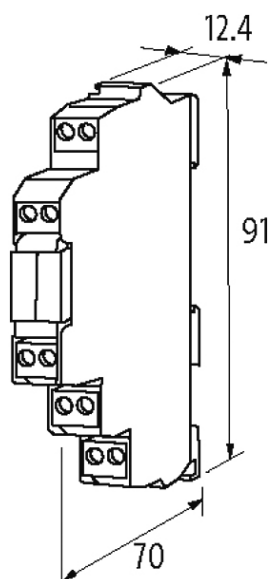

Product may differ from Image

## Approvals



## Input

|                              |                                        |
|------------------------------|----------------------------------------|
| Connection voltage - current | 24 V AC/DC (19.2...30 V AC/DC) - 20 mA |
| LED display                  | LED (green)                            |

## Utilization category

|       |                                                   |
|-------|---------------------------------------------------|
| AC-12 | 6 A (24/110/230 V AC)                             |
| AC-15 | 3 A (24/110/230 V AC)                             |
| DC-13 | 1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC) |

## General data

|                        |                                            |
|------------------------|--------------------------------------------|
| Mech./ elect. life     | 20.000.000 switching cycles/load dependent |
| Test isolation voltage | 4 kV; safe separation (EN 60947-1)         |
| Mounting method        | DIN-rail mountable (EN 60715)              |
| Temperature range      | -20...+55 °C                               |
| Dimensions H x W x D   | 91x12.4x70 mm                              |

## Output

|                                      |                    |
|--------------------------------------|--------------------|
| Switching voltage                    | max. 250 V AC/DC   |
| Switching current per output         | max. 6 A           |
| Min. load current                    | 100 mA (12 V DC)   |
| Power rating (voltage dependent)     | max. 1500 VA/120 W |
| Switching frequency                  | max. 10 Hz         |
| Contact material                     | Ag Sn O2           |
| Energize/release/contact bounce time | 10/15/1.5 ms       |

## Commercial data

|                        |               |
|------------------------|---------------|
| country of origin      | CZ            |
| customs tariff number  | 85364900      |
| EAN                    | 4048879000147 |
| eClass                 | 27371001      |
| minimum order quantity | 1             |