

STELLA-RS

~25° spot beam. Compatible with up to 30 mm LES size COBs.


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 90.0 mm
Height	39.2 mm
Fastening	screw
Colour	black
Box size	480 x 280 x 300 mm
Box weight	9.8 kg
Quantity in Box	90 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:



Component	Type	Material	Colour
STELLA-RS	Single lens	Silicone	clear
STELLA-FRAME	Holder	PA66	black



PHOTOMETRIC DATA (MEASURED):



bridgelux[®]

LED V22 Gen7
FWHM 29.0°
Efficiency 94 %
Peak intensity 2.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:

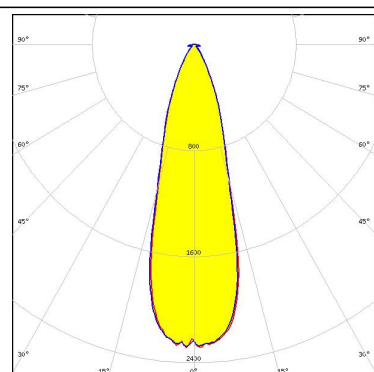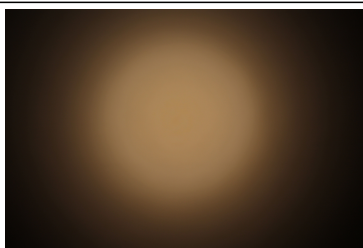



bridgelux[®]

LED V22 Gen7
FWHM 29.0°
Efficiency 94 %
Peak intensity 2.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:
TE: 2213480-1

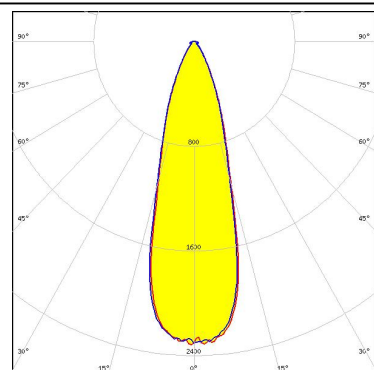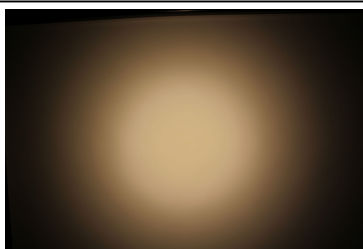



bridgelux[®]

LED V22 Gen7
FWHM 29.0°
Efficiency 94 %
Peak intensity 2.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 431 Typ Z1

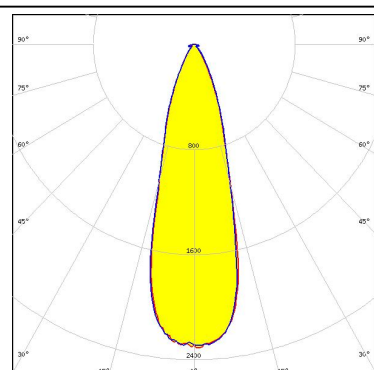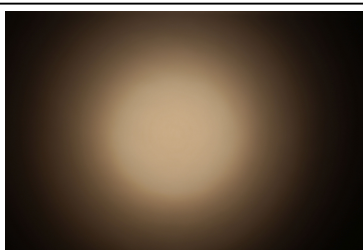

bridgelux[®]



LED VERO13
FWHM 18.0°
Efficiency 94 %
Peak intensity 6.400 cd/lm
LEDs/each optic 1
Light colour White
Required components:

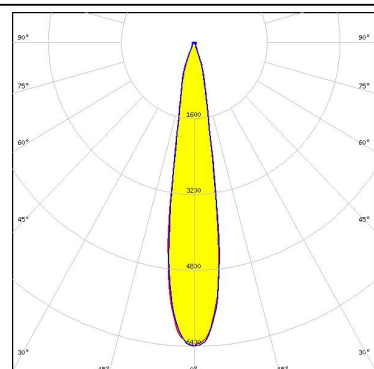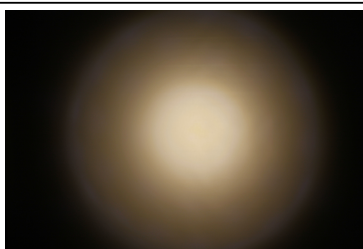



PHOTOMETRIC DATA (MEASURED):



LED VERO18
FWHM 24.0°
Efficiency 94 %
Peak intensity 3.500 cd/lm
LEDs/each optic 1
Light colour White
Required components:

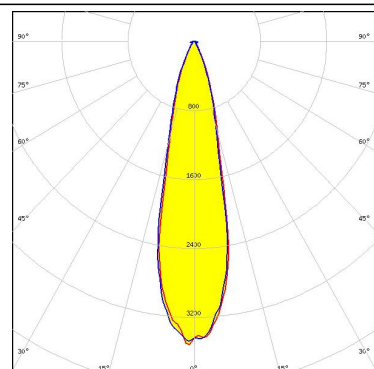
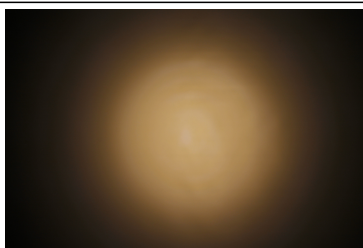


LED VERO29
FWHM 39.0°
Efficiency 94 %
Peak intensity 1.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:

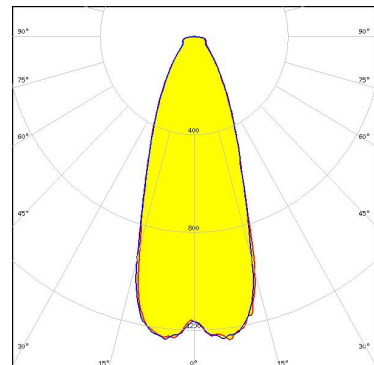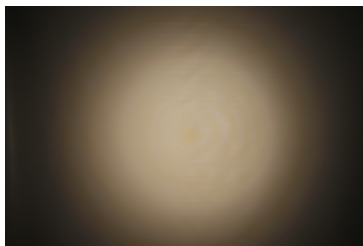


CITIZEN

LED CLL04x/CLU04x
FWHM 29.0°
Efficiency 94 %
Peak intensity 2.400 cd/lm
LEDs/each optic 1
Light colour White
Required components:

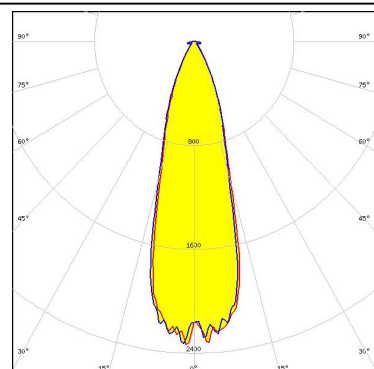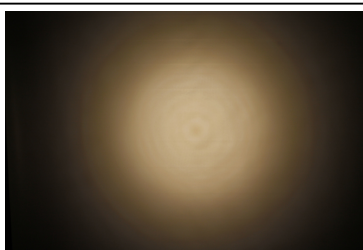



LED CXA/B 1816 & CXA/B 1820 & CXA 1850
FWHM 18.0°
Efficiency 94 %
Peak intensity 6.500 cd/lm
LEDs/each optic 1
Light colour White
Required components:

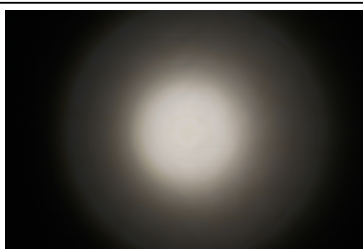



PHOTOMETRIC DATA (MEASURED):





LED CXA/B 30xx
FWHM 31.0°
Efficiency 94 %
Peak intensity 2.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:

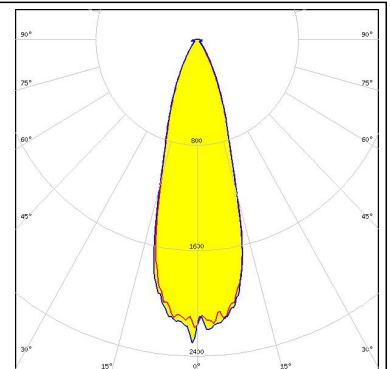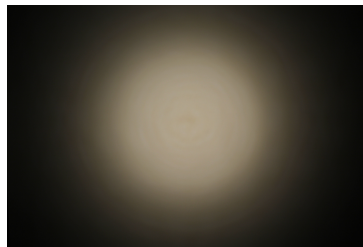


LED LUXEON CoB 1211
FWHM 26.0°
Efficiency 94 %
Peak intensity 3.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 431 Typ L3

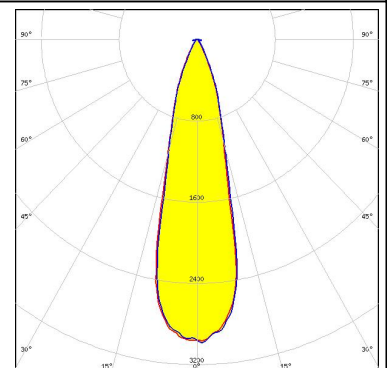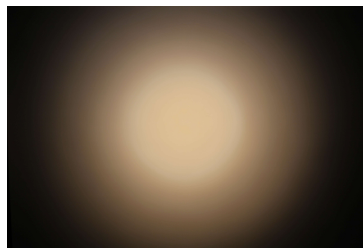

LED COB H-Type
FWHM 30.0°
Efficiency 94 %
Peak intensity 2.200 cd/lm
LEDs/each optic 1
Light colour White
Required components:

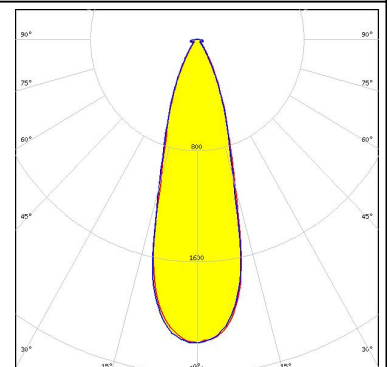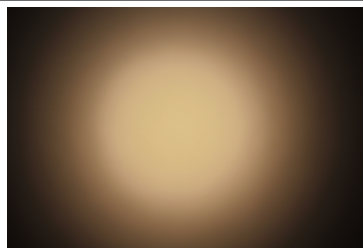



LED COB J-Type
FWHM 20.0°
Efficiency 94 %
Peak intensity 5.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:

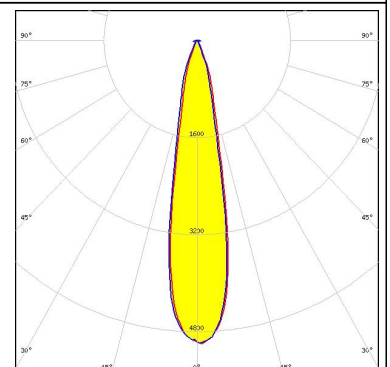

PHOTOMETRIC DATA (MEASURED):

SAMSUNG


LED COB D Series LES 22 mm
FWHM 29.0°
Efficiency 93 %
Peak intensity 2.200 cd/lm
LEDs/each optic 1
Light colour White
Required components:

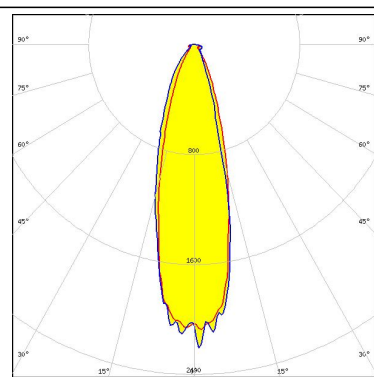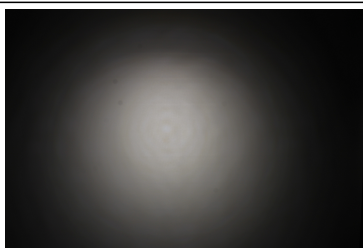


PHOTOMETRIC DATA (SIMULATED):



LED V10 Gen7
FWHM 14.0°
Efficiency 96 %
Peak intensity 9.918 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 486 Typ L1

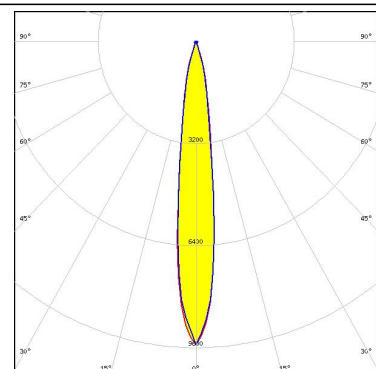


LED VERO10
FWHM 13.0°
Efficiency 94 %
Peak intensity 11.900 cd/lm
LEDs/each optic 1
Light colour White
Required components:

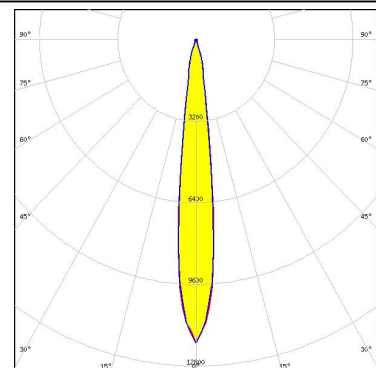


CITIZEN

LED CLL05x/CLU05x
FWHM 43.0°
Efficiency 94 %
Peak intensity 1.020 cd/lm
LEDs/each optic 1
Light colour White
Required components:

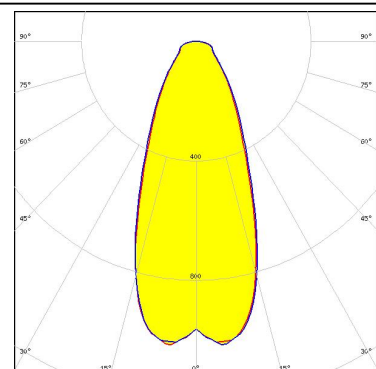


LED CMA2550
FWHM 27.0°
Efficiency 94 %
Peak intensity 3.200 cd/lm
LEDs/each optic 1
Light colour White
Required components:

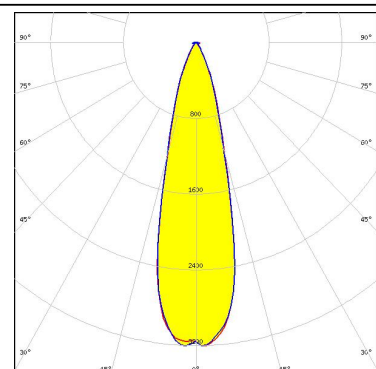


PHOTOMETRIC DATA (SIMULATED):




LED CMA3090
FWHM 30.0°
Efficiency 94 %
Peak intensity 2.420 cd/lm
LEDs/each optic 1
Light colour White
Required components:

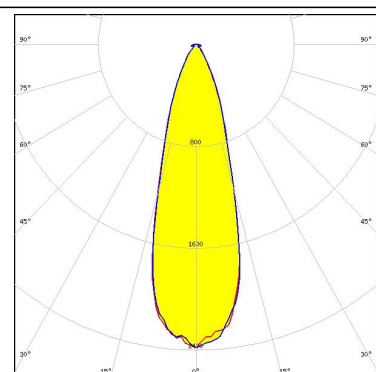


LED CXA/B 25xx
FWHM 25.0°
Efficiency 94 %
Peak intensity 3.400 cd/lm
LEDs/each optic 1
Light colour White
Required components:

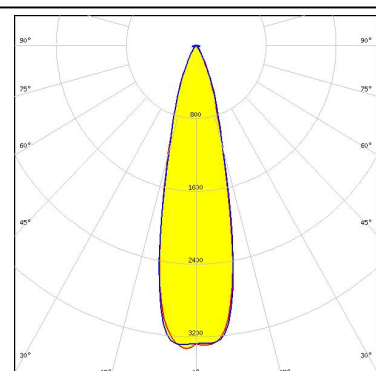

LED LUXEON CoB 1216/1812
FWHM 31.0°
Efficiency 94 %
Peak intensity 2.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:

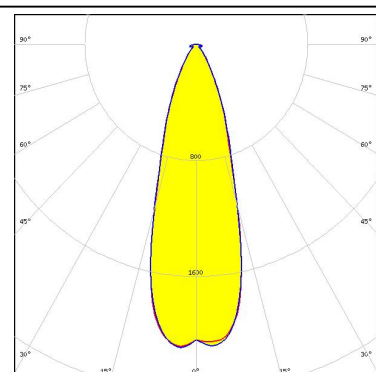


LED LUXEON CoB 1321
FWHM 41.0°
Efficiency 94 %
Peak intensity 1.200 cd/lm
LEDs/each optic 1
Light colour White
Required components:

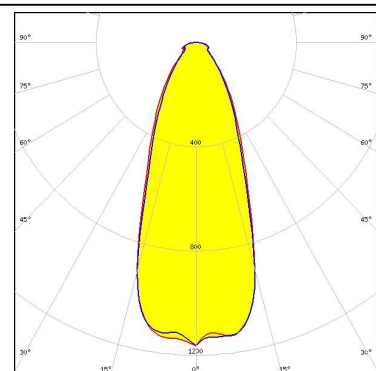


PHOTOMETRIC DATA (SIMULATED):



LED LUXEON CoB 1825
FWHM 44.1°
Efficiency 94 %
Peak intensity 0.940 cd/lm
LEDs/each optic 1
Light colour White
Required components:

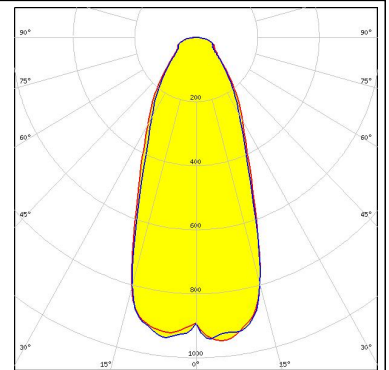

LED SLE G6 LES19
FWHM 23.0°
Efficiency 94 %
Peak intensity 4.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 466 Typ L4

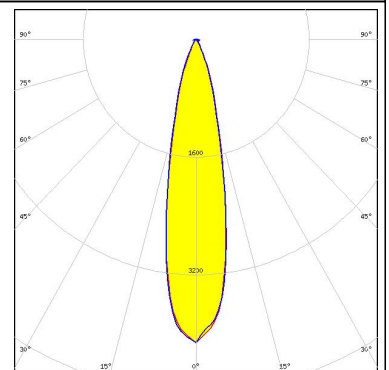

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)